

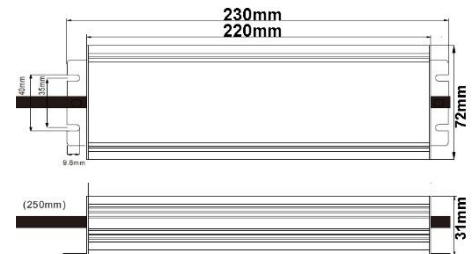


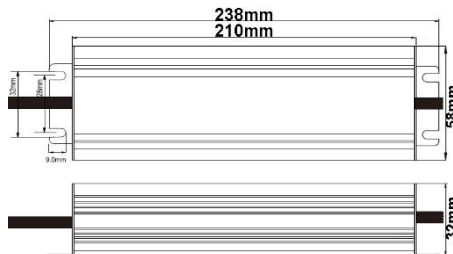

PRI-ETR-Z-100W

PRI-ETR-Z-200W

PRI-ETR-Z-300W

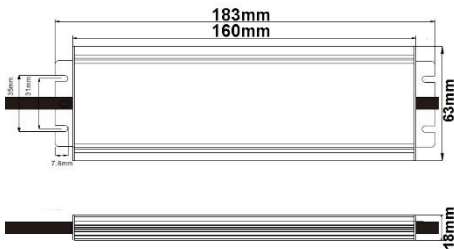

Specifications

Product Code: PRI-ETR-Z-100W
 Frequency: 50/60Hz
 Input Voltage: 175~264VAC
 Input Current: 0.65~1A
 IP Rating: IP67
 Output voltage: 12/24VDC
 Output current: 8.33A (12V)
 4.16A (24V)
 Work Temp.: -30~+50°C
 Storage Temp.: -40~85°C
 Case Material: Aluminum
 Dimensions: 183X63X18mm
 Certifications: SAA, CE, RoHS

Specifications

Product Code: PRI-ETR-Z-200W
 Frequency: 50/60Hz
 Input Voltage: 175~264VAC
 Input Current: 1.17~1.76A
 IP Rating: IP67
 Output voltage: 12/24VDC
 Output current: 16.67A (12V)
 8.33A (24V)
 Work Temp.: -30~+50°C
 Storage Temp.: -40~85°C
 Case Material: Aluminum
 Dimensions: 238X58X32mm
 Certifications: SAA, CE, RoHS

Specifications

Product Code: PRI-ETR-Z-300W
 Frequency: 50/60Hz
 Input Voltage: 175~264VAC
 Input Current: 1.78~2.65A
 IP Rating: IP67
 Output voltage: 12/24VDC
 Output current: 25A (12V)
 12.5A (24V)
 Work Temp.: -30~+50°C
 Storage Temp.: -40~85°C
 Case Material: Aluminum
 Dimensions: 230X72X31mm
 Certifications: SAA, CE, RoHS