




Features

- Adopting SMD 0805 as its light source.
- It could be bent or twist to fit your designs.
- Round shape with high flexibility
- Convenient cutting units with high flexibility
- Be suitable for indoor and outdoor contour decoration

Specifications

Product code:	PRI-CLE-RO/SQ-MINI	Mini cutting unit:	3psc (8.34cm)
Operate voltage:	12VDC	Max. Connection:	10 meter
Power:	2.2W/meter	Colour:	Cool white, Blue
LED Quantity:	36LED/meter	IP rate:	IP 67
LED distance:	2.78cm	Dimension:	ø5.5mm

Connection Instruction

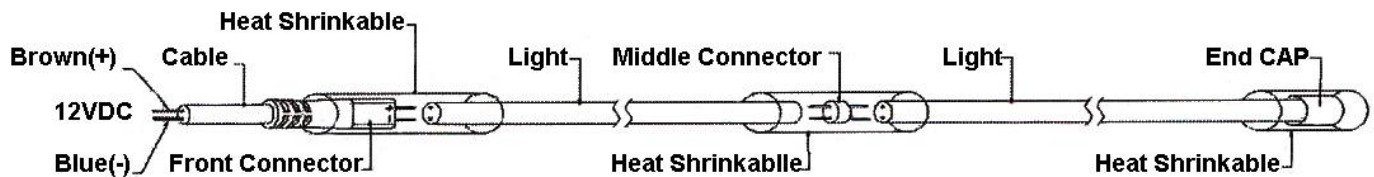

1. Align the pins to the conductors in the PRI-CL-RO-MINI, ensure that the polarity is correct. (Brown:+, Blue:-) There are cutting maker at every cutting point. It will be damaged if energized and connected incorrectly.
2. Push the pins into the conductors;
3. Apply silicon to the PRI-CL-RO-MINI. Slide a length of heat shrink tube over the connector and rope light to completely cover the connector and joint. Using a heat gun gently apply heat till heat-shrink tube place over the assembly.
4. To install the end cap apply the silicon liberally onto the end side of the rope light, put the end cap onto the place, then slide a heat shrink tube to completely cover the cap and joint. Using a heat gun gently apply heat till heat-shrink tube into the place.
5. All joints, end caps and connectors must be sealed strictly to achieve IP 67



Accessories for PRI-CLE-RO/SQ-MINI.

